




Electronic Initiation System

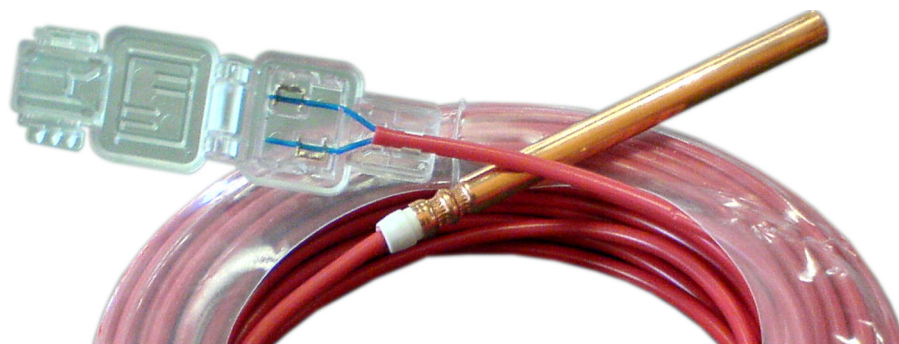

Product Description

The DIGISHOT electronic initiation system is an innovative advance in technology, enabling users to achieve the accurate timing benefits of electronic initiation systems with robust all-weather surface connectors.

Customer Benefits

- **Accurate timing** enables customers to achieve a variety of benefits ranging from better fragmentation to improved crusher throughput to happier neighbors resulting from decreased Peak Particle Velocity (PPV) and/or improved frequencies.
- **Easy to use**, menu-driven software
- **Minimal on-bench components** ... just the electronic DIGISHOT detonator (in the borehole) and a 2-wire busline on the pattern.
- **No delay timing input on the bench** ... makes the blast loading and hookup process easier and minimizes errors.
- **All delay timing is defined on the DIGISHOT Blast Box** so the pattern and timing sequence can be handled in a safe, off-bench location. Timing can even be managed, for your convenience, day(s) before the actual blast.
- **Delay timing** is the choice of the blaster: **auto-programmed** (easier, time-saving, decreased error) or **fully programmable** (facilitates the use of virtually any delay scheme).
- Multiple DIGISHOT Blast Boxes (**1 Master and a Slave unit**) can be used to facilitate larger blasts.

Properties

MSDS #1152

Detonator Shell	Copper
Cable Color	Red
Tensile Strength	374 N / 84 lbs
System Operating Temperature (range)	-20° to +50°C -4° to +122°F
Detonator Strength	#12
Net Explosive Quantity (per 100 units)	0.1000 kg / 0.2205 lbs
Maximum Delay	20,000 ms
Maximum Detonators per Blaster	450
Maximum Surface Wire Length	2.5 km

Packaging

Length (m)		Case Quantity	Case Weight	
Meters	Feet		kg	lbs
9	30	84	12.9	28.4
15	50	60	14.0	30.9
18	60	50	14.6	32.2
24	80	40	15.0	33
30	100	32	14.9	32.8
37	120	24	13.5	29.8
46	150	24	16.2	35.7
55	180	18	15.5	34.2

Length rounded to nearest whole meter.

Hazardous Shipping Description

Detonators, electric, 1.4B, UN0255 PG II




Unique Features

- **No Delay Assignment on the Bench** The blaster simply “tells” each detonator its location in the blast ... nothing more! The DIGISHOT electronic initiation system automatically checks the functionality of the detonator while concurrently assigning the detonator to its location in the pattern.
- **Tagger** The DIGISHOT Tagger is a unique, light-weight, blaster-friendly hand-held tool used to assign the borehole / DIGISHOT detonator location with minimal key strokes. The Tagger can be used to test an individual detonator, part of the pattern or the entire circuit prior to leaving the bench. The Tagger, together with the DIGISHOT Blast Box, enables initiation of the blast from a point of safety. Easy-to-follow screen menus lead the blaster through all on-bench and firing operations.
- **DIGISHOT Blast Box** The DIGISHOT Blast Box can program **and** fire the blast at any point after the desired delay timing is input. For flexibility, the delay timing can be entered **at any time** ... the day of the blast, the day before or any day at all ... whatever is easiest. And, for added security, the DIGISHOT Blast Box is password protected, requires a DIGISHOT specific blast key and uses a coded signal to fire the blast.
- The connectors are all rugged and water resistant. ESD Resistance, RF Resistance, Cable Abrasion & Cutting Resistance all pass CEN TS 13763-27, the European Standards of Compliance for Electronic Detonators.

Transportation, Storage and Handling

- DIGISHOT must be transported, stored, handled and used in conformity with all federal, state, provincial and local laws and regulations.
- For maximum shelf life (3 years), DIGISHOT must be stored in a cool, dry, well ventilated magazine. Explosive inventory should be rotated. Avoid using new materials before the old. For recommended good practices in transporting, storing, handling and using this product, see the booklet “Prevention of Accidents in the Use of Explosive Materials” packed inside each case and the Safety Library Publications of the Institute of Makers of Explosives.

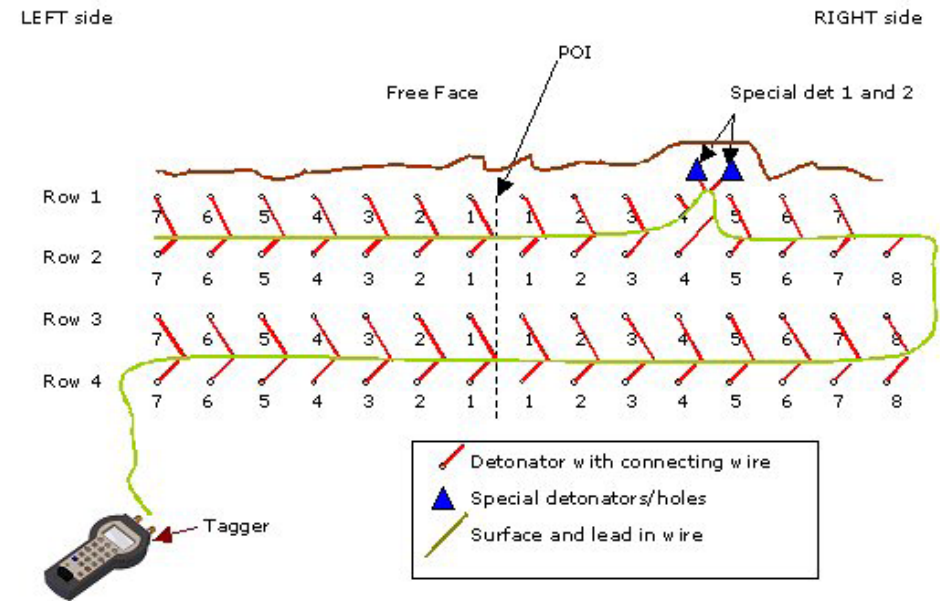

Application Recommendations

Due to the system's flexibility, contact your local Dyno Nobel representative for Application Recommendations.

Case Dimensions

40.5 x 29.25 x 28.5 cm 16 x 11.5 x 11.25 in

DigiShot™ is a trademark of DetNet South Africa (Proprietary) Limited.

Product Disclaimer Dyno Nobel Inc. and its subsidiaries disclaim any warranties with respect to this product, the safety or suitability thereof, or the results to be obtained, whether express or implied, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND/OR OTHER WARRANTY. Buyers and users assume all risk, responsibility and liability whatsoever from any and all injuries (including death), losses, or damages to persons or property arising from the use of this product. Under no circumstances shall Dyno Nobel Inc. or any of its subsidiaries be liable for special, consequential or incidental damages or for anticipated loss of profits.