


TITAN[®] 1000 LD

Technical Information



Sensitized Bulk Emulsion

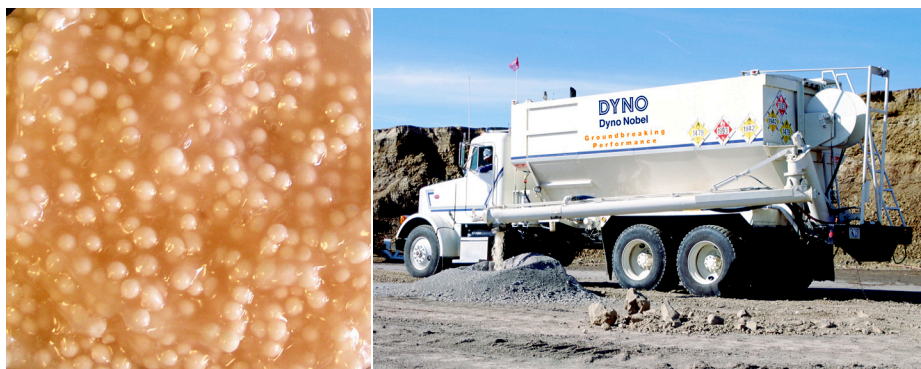

Product Description

TITAN 1000 LD is a booster sensitive, high performance, economical, repumpable bulk emulsion explosive specifically formulated to provide superior blasting performance in nearly all open pit applications where large diameter boreholes are used. TITAN 1000 LD can be used alone, blended with up to 45% ANFO for direct pumping to the bottom of water-filled boreholes or as the emulsion explosive component for augerable Heavy ANFO blends. The percentage of emulsion in TITAN 1000 LD Heavy ANFO blends can be varied to best match specific blasting requirements. Refer to the data table at right for the physical properties and loading methods for some typical TITAN 1000 LD emulsion/ANFO explosive blends.

Application Recommendations

- Only ANFO manufactured with emulsion compatible AN prills is recommended for use in TITAN 1000 LD Heavy ANFO blends.
- The minimum cast booster recommended to prime TITAN 1000 LD and TITAN 1000 LD Heavy ANFO blends is 454 g (16 oz).
- **ALWAYS** double prime when bulk explosive columns exceed 6 m (20 ft). One primer should be positioned near the bottom of the hole and the second nearer the top of the explosive column.

Properties

MSDS
#1062

	1000	1070	1050	1040	1030
Percent Emulsion	100	70	50	40	30
Density (g/cc) Avg	1.25	1.29	1.30	1.25	1.15
(g/cc) Max	1.27	1.31	1.33	1.28	1.18
Energy^a (cal/g)	680	740	780	800	820
(cal/cc)	850	955	1,015	1,000	945
Relative Weight Strength^{a,b}	0.77	0.84	0.89	0.91	0.93
Relative Bulk Strength^{a,b}	1.17	1.32	1.41	1.39	1.31
Velocity^c (m/sec)	5,800	5,600	5,400	5,000	4,700
(ft/sec)	19,000	18,500	17,700	16,400	15,300
Detonation Pressure^c (Kbars)	105	101	95	78	64
Gas Volume^a (moles/kg)	45.0	44.8	44.4	44.2	44.0
Water Resistance	Excellent	Excellent	Good	Fair	Poor
Minimum Diameter (mm)	90	115	150	125	125
(inches)	3.5	4.5	6	5	5
Loading Method	Pump	Pump	Auger	Auger	Auger

^a All Dyno Nobel Inc. energy and gas volume values are calculated using PRODET™, a computer code developed by Dyno Nobel Inc. for its exclusive use. Other computer codes may give different values.

^b ANFO = 1.00 @ 0.82 g/cc

^c Confined in 150 mm (6 in) diameter at average density.

Hazardous Shipping Description

Explosive, Blasting, Type E 1.5 UN 0332 II



TITAN[®] 1000 LD

Technical Information



Application Recommendations (continued)

- Do not use with detonating cord in borehole diameters less than 200 mm (8 in).
- **NEVER** load TITAN 1000 LD Heavy ANFO blends into boreholes where standing water is present! Only load TITAN 1000 LD Heavy ANFO Blends with 50% or greater ANFO into dry or dewatered boreholes. Blends with greater than 65% ANFO are not recommended in applications where water may seep back into the borehole, unless a liner is used.
- **ALWAYS** use pumped TITAN 1000 LD emulsion or TITAN 1000 LD emulsion/ANFO blends when standing water remains in a borehole.
- Maximum borehole sleep time is two (2) weeks. Where geology is wet and extended sleep times are anticipated, **ALWAYS** limit ANFO percentage in TITAN 1000 LD Heavy ANFO blends to less than 50%. When product will sleep overnight and less water resistant blends are being considered, consult your Dyno Nobel representative for loading recommendations.
- **NEVER** store blended TITAN 1000 LD ANFO blends in bulk delivery equipment, tanks or bins. TITAN 1000 LD and ANFO should be blended and loaded directly into the borehole. Once blended, use only equipment specially designed to blend and load emulsion/ANFO or Heavy ANFO blends.
- **ALWAYS** use only equipment specially designed to blend and load Heavy ANFO. Ensure safety systems are operational before each use.
- Bulk delivery equipment should be calibrated periodically to ensure blend quality and explosive performance. Ensure safety systems are operational before each use.
- Routinely monitor the TITAN 1000 LD / ANFO blend density to ensure that equipment remains in calibration during loading.

Transportation, Storage and Handling

- TITAN 1000 LD can be stored for 3 months at temperatures between -18° C and 32° C (0° F and 90° F). Older product should be used first and all storage tanks should be kept clean of residual product.
- Use only pumps which have been approved by Dyno Nobel for 1.5 emulsion explosive transfer. Pump type, pump speed, worn pump parts, repeated repumping and pumping against high hose pressures can increase TITAN 1000 LD viscosity and decrease shelf life.
- **ALWAYS** monitor emulsion pump performance and check pumps periodically for excessively worn parts. Design storage facilities to minimize repeated pumping.
- Transport, store, handle and use TITAN 1000 LD in compliance with federal, state, provincial and local laws governing bulk explosives.

Product Disclaimer Dyno Nobel Inc. and its subsidiaries disclaim any warranties with respect to this product, the safety or suitability thereof, or the results to be obtained, whether express or implied, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND/OR OTHER WARRANTY. Buyers and users assume all risk, responsibility and liability whatsoever from any and all injuries (including death), losses, or damages to persons or property arising from the use of this product. Under no circumstances shall Dyno Nobel Inc. or any of its subsidiaries be liable for special, consequential or incidental damages or for anticipated loss of profits.

Dyno Nobel Inc.

2795 East Cottonwood Parkway, Suite 500, Salt Lake City, Utah 84121 USA
Phone 800-732-7534 Fax 801-328-6452 Web www.dynonobel.com

DYNO
Dyno Nobel

Groundbreaking Performance